

WEATHER STATION MA10901
Instruction Manual

INTRODUCTION


Congratulations on purchasing this weather station as an example of innovative design and quality piece of engineering. Providing time, date, calendar, indoor and outdoor temperature, indoor and outdoor relative humidity, this unit will never keep you guessing on current and future weather conditions. Operation of this product is simple and straightforward. By reading this operating manual, the user will receive a better understanding of the weather station together with the optimum benefit of all its features.

« Instant Transmission+» is the up and coming state-of-the-art new wireless transmission technology, exclusively designed and developed by LA CROSSE TECHNOLOGY. "IT +" offers you an immediate update of all your outdoor data measured from the transmitters: follow your climatic variations in real-time!




FEATURES

The Weather Station

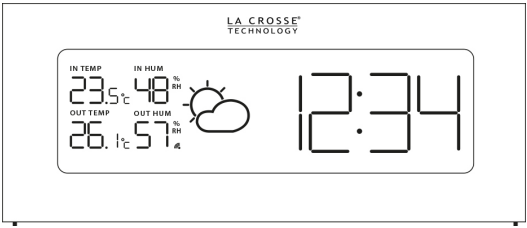

- DCF Radio controlled time with manual setting option
- Time reception ON/OFF setting
- Weekday, date and month display (year only in setting mode)
- Time zone option (-12h to +12h)
- Alarm setting
- Temperature display in degree Celsius (°C)
- Indoor temperature display with MIN/MAX recordings
- Outdoor temperature display with MIN/MAX recordings with time and date received
- All MIN/MAX recordings can be reset
- Indoor and outdoor humidity display in RH%
- Weather forecast with weather tendency indicator
- Low battery indicator for outdoor sensor
- Table standing

Thermo-Hygro Transmitter




- Remote transmission of outdoor temperature and humidity to weather station by 868MHz
- Wall mounting case
- Mounting at a sheltered place. Avoid direct rain and sunshine

SETTING UP

Note: This weather station receives only one outdoor transmitter.


1. First, insert the batteries in the transmitter (see "How to install and replace batteries in the thermo-hygro transmitter" above).
2. Within 30 seconds of powering up the transmitter, power up also the weather station with the included AC adapter (see "Weather station power supply" above). Once the weather station is powered up, all segments of the LCD will light up briefly and a short signal tone will sound. Then the indoor temperature, humidity and the time as 0:00 will be displayed. If these informations are not displayed on the LCD after 60 seconds, remove the power supply and wait for at least 60 seconds before reinserting them. Once the indoor data is displayed user may proceed to the next step.
3. The weather station will also start receiving data signal from the transmitter. The outdoor temperature and humidity data should then be displayed on the weather station. If this does not happen after 2 minutes, the power supply will need to be removed from both units and reset from step 1.
4. In order to ensure successful 868 MHz transmission, the distance between the weather station and the transmitter should be within 100 meters (see notes on "Positioning" and "868 MHz Reception").
5. Once the outdoor data reception test period is completed, the DCF tower icon in the clock display will start flashing in the upper left corner. This indicates that the clock has detected that there is a radio signal present and is trying to receive it. When the time code is received, the DCF tower becomes permanently lit and the time will be displayed.

WEATHER STATION POWER SUPPLY

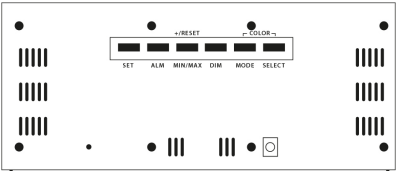

Main power supply must be the AC adapter included. No batteries can be used.

TO INSTALL AND REPLACE BATTERIES IN THE THERMO-HYGRO TRANSMITTER



- The outdoor thermo-hygro transmitter uses 2 x AA, IEC LR6, 1.5V batteries. To install and replace the batteries, please follow the steps below:
1. Remove the battery cover by pushing the battery cover upwards with your thumb.
 2. Insert the batteries, observing the correct polarity (see battery compartment marking).
 3. Replace the battery cover on the unit.

Note:

In the event of changing batteries in any of the units, all units need to be reset by following the setting up procedures. This is due to a random security code assigned by the transmitter at start-up. This code must be received and stored by the weather station in the first 3 minutes of power being supplied to the transmitter.

ADD DEVICE TO MOBILE-ALERTS SYSTEM

(MOBILE ALERTS gateway needed, sold separately)

Open the app, dashboard is displayed. Tap "Add new sensor" and scan the QR code on the back of the MA10900. Then set a name for the sensor. To set a name, select the transmitter and then tap on the left area of the pencil icon in the upper right.

Note: only the data for indoor, outdoor temperature and indoor, outdoor humidity are transmitted to Mobile-Alerts.

DCF RADIO CONTROLLED TIME

The time base for the radio controlled time is a Cesium Atomic Clock operated by the Physikalische Technische Bundesanstalt Braunschweig which has a time deviation of less than one second in one million years. The time is coded and transmitted from Mainflingen near Frankfurt via frequency signal DCF-77 (77.5 kHz) and has a transmitting range of approximately 1,500 km. Your radio-controlled weather station receives this signal and converts it to show the precise time in summer or wintertime. The quality of the reception depends greatly on the geographic location. In normal cases, there should be no reception problems within a 1,500 km radius of Frankfurt.

DCF reception is done twice daily at 02:00 and 03:00 am. If the reception is not successful at 03:00 am, then the next reception takes place the next hour and so on until 06:00am, or until the reception is successful. If the reception is not successful at 06:00 am, then the next attempt will take place the next day at 02:00 am.

If the tower icon flashes, but does not set the time or the DCF tower does not appear at all, then please take note of the following:

- Recommended distance to any interfering sources like computer monitors or TV sets is a minimum of 1.5 - 2 meters.
- Within ferro-concrete rooms (basements, superstructures), the received signal is naturally weakened. In extreme cases, please place the unit close to a window and/ or point its front or back towards the Frankfurt transmitter.
- During nighttime, the atmospheric disturbances are usually less severe and reception is possible in most cases. A single daily reception is adequate to keep the accuracy deviation below 1 second.

FUNCTION KEYS:

Weather station:

The weather station has 6 easy to use function keys:



SET – key

- Single press to toggle Date display and Clock display
- During set mode, change set items in sequence RCC ON/OFF, year, month, day, hour, minute, master reset, quit set mode.
- Reset the weather station
- Stop learning transmitter
- Stop RCC reception

MIN/MAX / + / RESET – key

- Increase set items at normal set mode or alarm set mode
- Auto increase set items at normal set mode or alarm set mode when press and hold it
- Switch display in sequence indoor temperature / outdoor temperature / indoor humidity / outdoor humidity minimum display, indoor temperature / outdoor temperature / indoor humidity / outdoor humidity maximum display, and quit to normal mode during Clock display
- Hold 2s to clear all maximum minimum temperature and humidity value during Clock display or Min Max display
- Stop learning transmitter
- Stop RCC reception

ALM – key

- Single press to change Alarm display from clock display or Date display
- Toggle alarm on/off during Alarm display
- Hold 2s to enter alarm set mode during Alarm display, and alarm hour set firstly and turn alarm on.
- Change to set alarm minute when setting alarm hour
- Quit alarm set mode when setting alarm minute.
- Stop learning transmitter
- Stop RCC reception

DIM – key

- Adjust back light brightness in sequence, Strong, Middle and Weak. "D1" will be displayed for Strong, "D2" will be displayed for Middle and "D3" will be displayed for Weak
- Stop learning transmitter
- Stop RCC reception

MODE – key


- Single press to toggle back light colour mode as sequence: temperature colour mode, single colour mode and rotate colour mode (22 colours).
- Manual search of outdoor sensor

SELECT – key

- In single colour mode, press the SELECT key to select the desired back light. "col" will be shown in every keypressed

LCD SCREEN

The LCD screen is split into several sections displaying the information for time/calendar, indoor data, weather forecast and outdoor data.

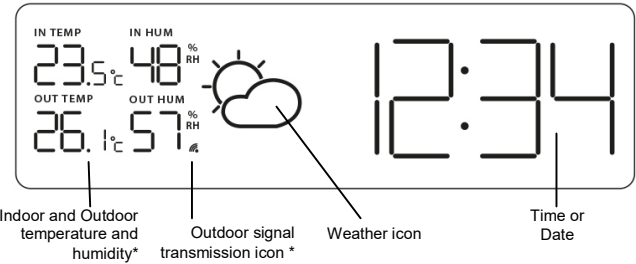


* When the signal is successfully received by the weather station, the outdoor transmission icon will be switched on. (If not successful, the icon will not be shown on LCD). The user can then easily see whether the last reception was successful (icon on) or not (icon off).

MANUAL SETTINGS

The following settings can be changed when pressing and holding the SET key:

- Time zone setting
- Time reception ON/OFF setting
- Manual setting : year, month, date, time and minutes
- Calendar setting

TIME ZONE SETTING:

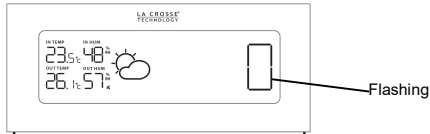


The time zone default of the weather station is "0". To set a different time zone:

1. The current time zone value starts flashing.
2. Use the MIN/MAX key to set the time zone. The range runs from -12h to +12h hours in 1-hour intervals.
3. Confirm with the SET key and enter the Time Reception ON/OFF Setting.

TIME RECEPTION ON/OFF SETTING

In area where reception of the DCF-77 time signal is not possible, the DCF-77 time reception function can be turned OFF. The clock will then work as a normal quartz clock.

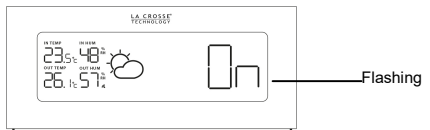


1. "On" will start flashing on the LCD.
2. Use the MIN/MAX key to turn OFF the time reception function.
3. Confirm with the SET key and enter the Calendar setting.

Note:

- If the Time Reception function is turned OFF manually, the clock will not attempt any reception of the DCF time as long as the Time Reception OFF function is activated.
- The time reception " " and the "DCF" icons will not be displayed on the LCD.

CALENDAR SETTING

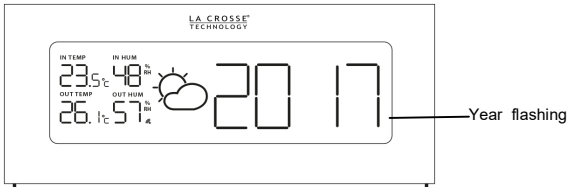

1. The year digits will start flashing.
2. Use the MIN/MAX key to set the year. Keep holding the key allows the value to advance faster.
3. Press the SET key to confirm and enter the month setting mode.
4. The month digit will be flashing. Use the MIN/MAX key to set the month. Keep holding the key allows the value to advance faster.
5. Press the SET key to enter date setting.
6. The date digit will be flashing. Use the MIN/MAX key to set the date. Keep holding the key allows the value to advance faster.
7. Confirm with the SET key and exit the manual setting.

MANUAL TIME SETTING:

In case the weather station cannot detect the DCF-signal (for example due to disturbances, transmitting distance, etc.), the time can be manually set. The clock will then work as a normal quartz clock.



1. The hour digit will start flashing.
2. Use the MIN/MAX key to set the hour. Keep holding the key allows the digit to advance faster.
3. Press again the SET key to set the minutes. The minute digits start flashing.
4. Use the MIN/MAX key to set the minutes. Keep holding the key allows the digit to advance faster
5. Confirm with the SET key and enter the Reset setting.

Note:

- The unit will still try and receive the signal despite it being manually set. When it does receive the signal, it will change the manually set time into the received time. During reception attempts the DCF tower icon will flash. If reception has been unsuccessful, then the DCF tower icon will not appear but reception will still be attempted the following day.
- The time reception " " and the "DCF" icons will not be displayed on the LCD after manual time setting.

RESET SETTING


You will be able to make a reset of the weather station at the very end of the settings :
- Once rSt is displayed, hold the RESET key until all segments will be display

The station will then go back to time display. All previous settings are suppressed.

TO EXIT THE MANUAL SETTING MODE

To exit the manual setting mode anytime during the manual setting, press the ALM key. The mode will return to normal time display.

ALARM SETTING



To set the alarm:

1. Press and hold ALM key for 3 seconds until the alarm time shown.
2. The hour digit will be flashing. Use the MIN/MAX key to adjust the hour. Keep holding the key allows the value to advance faster.
3. Use the ALM key again, and the minute digits will be flashing. Press MIN/MAX key to set the minute. Keep holding the key allows the value to advance faster.
4. Press the ALM key to confirm the setting.

Note:

To activate/deactivate the alarm function, press the ALM key once. The display of the alarm icon represents that the alarm is "ON". The duration of alarm sounding is 2 minutes. Press any key will stop the alarm sound.

WEATHER FORECASTING ICONS:

The weather icons in the second section of LCD can be displayed in any of the following combinations:



For every sudden or significant change in the air pressure, the weather icons will update accordingly to represent the change in weather. If the icons do not change, then it means either the air pressure has not changed or the change has been too slow for the weather station to register. However, if the icon displayed is a sun or raining cloud, there will be no change of icon if the weather gets any better (with sunny icon) or worse (with rainy icon) since the icons are already at their extremes.

The icons displayed forecasts the weather in terms of getting better or worse and not necessarily sunny or rainy as each icon indicates. For example, if the current weather is cloudy and the rainy icon is displayed, it does not mean that the product is faulty because it is not raining. It simply means that the air pressure has dropped and the weather is expected to get worse but not necessarily rainy.

Note:

After setting up, readings for weather forecasts should be disregarded for the next 12-24 hours. This will allow sufficient time for the weather station to collect air pressure data at a constant altitude and therefore result in a more accurate forecast.

Common to weather forecasting, absolute accuracy cannot be guaranteed. The weather forecasting feature is estimated to have an accuracy level of about 75% due to the varying areas the weather station has been designed for use. In areas that experience sudden changes in weather (for example from sunny to rain), the weather station will be more accurate compared to use in areas where the weather is stagnant most of the time (for example mostly sunny).

If the weather station is moved to another location significantly higher or lower than its initial standing point (for example from the ground floor to the upper floors of a house), discard the weather forecast for the next 12-24 hours. By doing this, the weather station will not mistake the new location as being a possible change in air-pressure when really it is due to the slight change of altitude.

WEATHER TENDENCY INDICATOR

The weather tendency indicators (located on the left side of the weather icons) are working together with the weather icons. When the indicator points upwards, it means that the air-

pressure is increasing and the weather is expected to improve, but when indicator points downwards, the air-pressure is dropping and the weather is expected to become worse.

Taking this into account, one can see how the weather has changed and is expected to change. For example, if the indicator is pointing downwards together with cloud and sun icons, then the last noticeable change in the weather was when it was sunny (the sun icon only). Therefore, the next change in the weather will be cloud with rain icons since the indicator is pointing downwards.

Note:
Once the weather tendency indicator has registered a change in air pressure, it will remain permanently visualized on the LCD.

INDOOR TEMPERATURE/HUMIDITY DATA

The indoor temperature and humidity data are automatically updated and displayed on the first section of the LCD.



OUTDOOR TEMPERATURE/HUMIDITY DATA

The last LCD section shows the outdoor temperature and humidity, and the reception indicator.




If outdoor temperature/humidity data shows "--,-", a manual search of the transmitter can be done : press and hold the MODE key for 3 seconds. The station will then start to search for a transmitter.

TOGGLEING AND RESETTING THE TEMPERATURE MIN/MAX DATA

TO VIEW THE MIN/MAX TEMPERATURE DATA

Press the **MIN/MAX** key several times to view the MIN/MAX indoor and outdoor temperature sequentially.

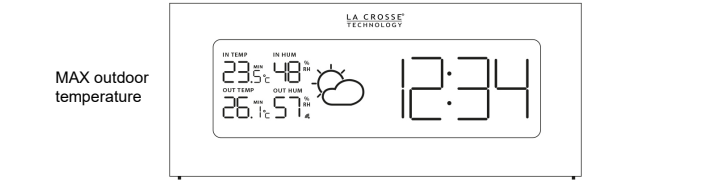

TO RESET TEMPERATURE MIN/MAX DATA

Press and hold **MIN/MAX** key for 3 seconds to reset all the indoor and outdoor temperature to current temperatures.

COLORED DISPLAY

Single press MODE key to toggle back light colour mode as sequence: temperature colour mode, single colour mode and rotate colour mode. Will display "C1" for temperature colour mode, "C2" for single colour mode and "C3" for rotate colour mode

In temperature colour mode:

- Back light colour change depend on outdoor temperature
- Total 21 different back light colours, refer to below table

#	deg C		R	G	B
1	over 30		191	0	0
2	29.9 to 28.0		153	37	0
3	27.9 to 26.0		127	63	0
4	25.9 to 24.0		109	81	0
5	23.9 to 22.0		95	95	0
6	21.9 to 20.0		76	114	0
7	19.9 to 18.0		47	143	0
8	17.9 to 16.0		0	191	0
9	15.9 to 14.0		0	143	47
10	13.9 to 12.0		0	114	76
11	11.9 to 10.0		0	95	95
12	9.9 to 8.0		0	76	114
13	7.9 to 6.0		0	47	143
14	5.9 to 4.0		0	0	191
15	3.9 to 2.0		37	0	153
16	1.9 to 0.0		63	0	127
17	-0.1 to -2.0		81	0	109
18	-2.1 to -4.0		95	0	95
19	-4.1 to -6.0		109	0	81
20	-6.1 to -8.0		127	0	63
21	-8.1 & below		153	0	37

In single colour mode

- Total 22 back light colours, 21 colors from temperature color mode plus a white color
- Press the SET key to change the back light colour when "C2" is showing in the display. "col" will be shown when the SELECT key is pressed. Continue to press the SELECT key to change different back light colours when "col" is showing in the display

In rotate colour mode

- Press the MODE key to display "c3"
- The back light color will change softly and continuously in a 18s cycle
- The back light colour rotates red ► yellow ► green ► cyan ► blue ► purple ► red ► ... endlessly

ABOUT THE THERMO-HYGRO TRANSMITTER

The range of the thermo-hygro transmitter may be affected by the temperature. At cold temperatures the transmitting distance may be decreased. Please bear this in mind when

positioning the transmitters. Also the batteries may be reduced in power for the thermo-hygro transmitter.

CHECKING FOR 868MHZ RECEPTION

If the outdoor temperature and humidity data are not being received within three minutes after setting up (or outdoor display always shows "--,-" in the outdoor section of the weather station during normal operation), please check the following points:

1. The distance of the weather station or transmitters should be at least 2 meters away from any interfering sources such as computer monitors or TV sets.
2. Avoid placing the transmitters onto or in the immediate proximity of metal window frames.
3. Using other electrical products such as headphones or speakers operating on the 868MHz-signal frequency may prevent correct signal transmission or reception. Neighbors using electrical devices operating on the 868MHz-signal frequency can also cause interference.

Note:

When the 868MHz signal is received correctly, do not re-open the battery cover of either the transmitter or weather station, as the batteries may spring free from the contacts and force a false reset. Should this happen accidentally then reset all units (see **"Setting up"** above) otherwise transmission problems may occur. The transmission range is around 100 meters from the thermo-hygro transmitter to the weather station (in open space). However, this depends on the surrounding environment and interference levels. If no reception is possible despite the observation of these factors, all system units have to be reset (see **"Setting up"** above).

POSITIONING THE WEATHER STATION

The weather station must be placed on a table.

POSITIONING THE THERMO-HYGRO TRANSMITTER

Mounting at a sheltered place. Avoid direct rain and sunshine.

The thermo-hygro transmitter can be placed onto any flat surface or wall mount using the bracket which doubles as a stand or wall mount base.

To wall mount:

1. Secure the bracket onto a desired wall using the screws and plastic anchors.
2. Clip the transmitter onto the bracket.

Note:

Before permanently fixing the thermo-hygro to the wall base, pace all units in the desired locations to check that the outdoor temperature and humidity readings are receivable. In event that the signal is not received, relocate the thermo-hygro transmitter or the weather station slightly as this may help the signal reception.

CARE AND MAINTENANCE

- Extreme temperatures, vibration and shock should be avoided as these may cause damage to the unit and give inaccurate forecasts and readings.
- When cleaning the display and casings, use a soft damp cloth only. Do not use solvents or scouring agents as they may mark the LCD and casings.
- Do not submerge the unit in water.
- Immediately remove all low powered batteries to avoid leakage and damage. Replace only with new batteries of the recommended type.
- Do not make any repair attempts to the unit. Return them to their original point of purchase for repair by a qualified engineer. Opening and tampering with the unit may invalidate their guarantee.
- Do not expose the units to extreme and sudden temperature changes, this may lead to rapid changes in forecasts and readings and thereby reduce their accuracy.

SPECIFICATIONS

Recommended operating temperature range : 5°C to 40°C

Temperature measuring range:

Indoor : -9.9°C to +59.9°C with 0.1°C resolution
("OF.L" displayed if outside this range)
Outdoor : -39.9°C to +59.9°C with 0.1°C resolution
("OF.L" displayed if outside this range, "---" displayed if no transmitter signal)

Humidity measuring range:

Indoor humidity range : 1% to 99% with 1% resolution
(Display "-,-" if temperature is OL.F; display "19%" if < 20% and "96%" if > 95%)
Outdoor humidity range : 1% to 99% with 1% resolution (Display "-,-" if outside temperature is OF.L; display 1% if < 1% and 99% if > 99%)

Data checking intervals:

Indoor temperature checking interval : every 16 seconds
Outdoor temperature reception : every 4 seconds
Transmission range : up to 100 meters (open space)

Power consumption (alkaline batteries recommended):

Weather station : AC adapter 230-240 VAC /
Output : 5 VDC/150mA

Transmitter : 2 x AA, IEC, LR6, 1.5V

Dimensions (L x W x H):

Weather station : 200 x 89 x 34.4 mm
Transmitter : 38.2 x 21.2 x 128.3 mm

LIABILITY DISCLAIMER:

- The electrical and electronic wastes contain hazardous substances. Disposal of electronic waste in wild country and/or in unauthorized grounds strongly damages the environment.
- Please contact your local and/or regional authorities to retrieve the addresses of legal dumping grounds with selective collection.
- All electronic instruments must from now on be recycled. User shall take an active part in the reuse, recycling and recovery of the electrical and electronic waste.
- The unrestricted disposal of electronic waste may do harm on public health and the quality of environment.
- As stated on the gift box and labeled on the product, reading the "User manual" is highly recommended for the benefit of the user. This product must however not be thrown in general rubbish collection points.
- The manufacturer and supplier cannot accept any responsibility for any incorrect readings and any consequences that occur should an inaccurate reading take place.
- This product is designed for use in the home only as indication of the temperature.
- This product is not to be used for medical purposes or for public information.
- The specifications of this product may change without prior notice.
- This product is not a toy. Keep out of the reach of children.

- No part of this manual may be reproduced without written authorization of the manufacturer.



R&TTE Directive 2014/53/EU

Summary of the Declaration of Conformity: We hereby declare that this wireless transmission device does comply with the essential requirements of R&TTE Directive 2014/53/EU.

Conformity declaration can be seen :

<http://www.lacrossetechnology.fr/P-18-A1-WSTX29TH-IT+.html>